


 **EUROCOMACH®**



LA GAMMA | THE RANGE, LA GAMME
MODELL ÜBERSICHT, LA GAMA

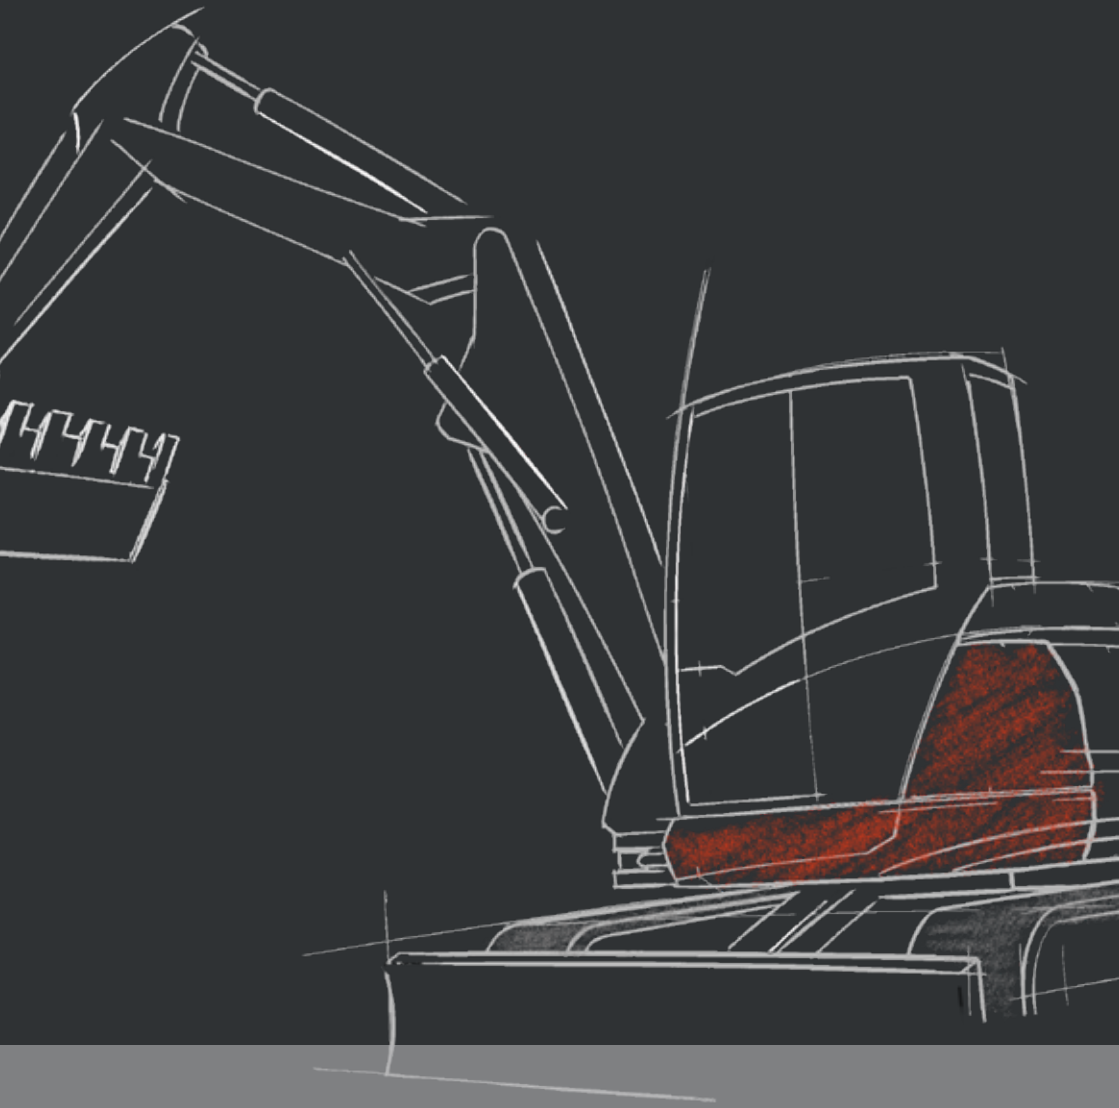

Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
ESP22	1.910 kg (4.211 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	15,4 kW - 20,9 HP	min. 990 mm (39,0 in) max. 1.300 mm (51,2 in)
ESP25	2.400 kg (5.291 lb)	YANMAR STAGE 5 - TIER 4 FINAL	15,5 kW - 21,1 HP	1.500 mm (59,1 in)
ESP28	2.800 kg (6.173 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,2 kW - 24,7 HP	1.550 mm (61,0 in)
ESP35	3.050 kg (6.764 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,2 kW - 24,7 HP	1.580 mm (62,2 in)
ESP45	4.200 kg (9.259 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	32,3 kW - 43,3 HP	1.750 mm (68,9 in)
ESP55	4.800 kg (10.582 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	43,3 kW - 57,1 HP	1.900 mm (74,8 in)
ESP58	5.300 kg (11.685 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	45,0 kW - 61,2 HP	1.980 mm (78,0 in)
ESP65	5.400 kg (11.904 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	45,0 kW - 61,2 HP	1.980 mm (78,0 in)



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
ESP100ZT4	8.840 kg (19.489 lb) • 10.220 kg (22.531 lb)	YANMAR STAGE 5 TURBO - TIER 4 FINAL	53,7 kW - 73,0 HP	STD: 2.320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
ESP100UR4	8.340 kg (18.387 lb) • 9.720 kg (21.429 lb)	YANMAR STAGE 5 TURBO - TIER 4 FINAL	53,7 kW - 73,0 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)

EXTRA-EU MODELS

(equipped with engine compliant with EPA TIER 3 or EU Stage IIIA emission standard)

ESP100ZT	8.840 kg (19.489 lb) • 10.220 kg (22.531 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	STD: 2.320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
ESP100UR	8.340 kg (18.387 lb) • 9.720 kg (21.429 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	STD: 2.320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)

• carro variabile - variable undercarriage - chassis variable - verstellb. unterwagen - carro inferior variable



Sampierana S.p.A.

Via Leonardo da Vinci, 40

47021 S. Piero in Bagno (FC) - ITALY

Tel. +39 0543 904211

www.eurocomach.com



**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =**

LAST UPDATE: 29/07/2021

Sampierana S.p.A. reserves the right to change technical data and product characteristics at any time without prior notice. The photos are for illustrative purposes only and do not necessarily refer to standard products.