


 **EUROCOMACH®**



LA GAMMA | THE RANGE, LA GAMME
MODELL ÜBERSICHT, LA GAMA

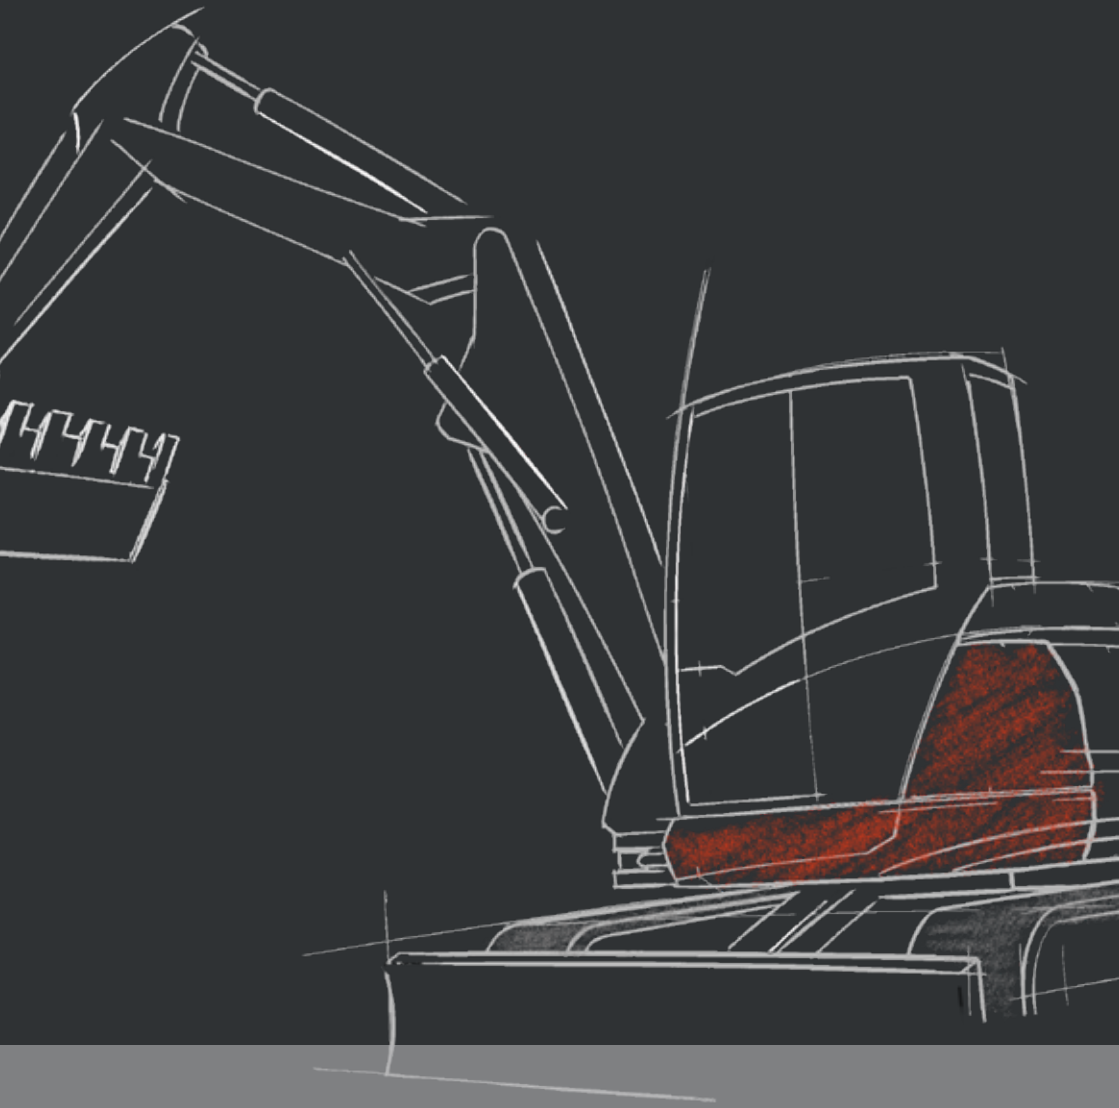

Modello • Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Larghezza max. Max width Largeur max. Max. breite Anchura max.
ESP 22 SR	1.820 kg (4,012 lb)	KUBOTA STAGE 5	15,4 kW - 20,9 HP	min. 990 mm (39.0 in) max. 1.300 mm (51.2 in)
ESP 24 SR	2.100 kg (4,630 lb)	YANMAR STAGE 5	14,0 kW - 19,0 HP	1.450 mm (57.1 in)
ESP 25 ZT	2.250 kg (4,960 lb)	YANMAR STAGE 5	15,5 kW - 21,1 HP	1.500 mm (59.1 in)
ESP 28.2 ZT	2.800 kg (6,173 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	24,9 kW - 33,4 HP	1.550 mm (61.0 in)
ESP 35.2 ZT	3.050 kg (6,724 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	24,9 kW - 33,4 HP	1.580 mm (62.2 in)
ESP 40.2 ZT	3.800 kg (8,377lb)	KUBOTA STAGE 5 - TIER 4 FINAL	28,3 kW - 38,0 HP	1.700 mm (66.9 in)

• Range in progress



Modello • Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Larghezza max. Max width Largeur max. Max. breite Anchura max.
ESP 50 ZT	4.900 kg (10.803 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	33,8 kW - 46,0 HP	1.980 mm (78.0 in)
ESP 60 ZT	5.200 kg (11.464 lb)	KUBOTA STAGE 3A - TIER 4 INTERIM	33,8 kW - 46,0 HP	1.980 mm (78.0 in)
ESP 100 ZT	9.220 kg (20,327 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
ESP 100 UR	8.720 kg (19,224 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
ESP 100 ZT4	9.220 kg (20,327 lb)	YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
ESP 100 UR4	8.720 kg (19,224 lb)	YANMAR STAGE 5 - TIER 4 FINAL	53,7 kW - 73,0 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)

• Range in progress



Sampierana S.p.A.
Via Leonardo da Vinci, 40 47021
S. Piero in Bagno (FC) - ITALY
Tel +39 0543.904211

www.eurocomach.com



**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =**

The information contained in this document is of general nature. Sampierana S.p.A. reserves the right to change technical data and product characteristics at any time without prior notice. The photos are for illustrative purposes only and do not necessarily refer to standard products. For instructions on the correct use of the products, see the use and maintenance manual. Sampierana S.p.A. shall not be held responsible for any damage to people and/or property, if the instructions contained in the use and maintenance manual are not complied with.