




LA GAMMA | THE RANGE, LA GAMME
MODELL ÜBERSICHT, LA GAMA



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
12ZT	1.160 kg (2.557 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	10,2 kW - 13,7 HP	1.860 mm (73,2 in)	min. 790 mm (31,1 in) max. 1.050 mm (41,3 in)
14SR	1.230 kg (2.712 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	10,2 kW - 13,7 HP	2.045 mm (80,5 in)	min. 790 mm (31,1 in) max. 1.050 mm (41,3 in)
18ZT	1.730 kg (3.813 lb)	YANMAR STAGE 5 - TIER 4 FINAL	11,2 kW - 15,2 HP	2.250 mm (88,6 in)	min. 990 mm (39,0 in) max. 1.300 mm (51,2 in)
22SR	2.190 kg (4.828 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	15,4 kW - 20,9 HP	2.560 mm (100,8 in)	min. 990 mm (39,0 in) max. 1.300 mm (51,2 in)
25ZT	2.540 kg (5.401 lb)	YANMAR STAGE 5 - TIER 4 FINAL	15,5 kW - 21,1 HP	2.725 mm (107,2 in)	1.500 mm (59,1 in)
28ZT	2.700 kg (5.952 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,5 kW - 25,0 HP	2.660 mm (104,7 in)	1.550 mm (61,0 in)
35ZT	3.350 kg (7.385 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,5 kW - 25,0 HP	2.880 mm (113,3 in)	1.580 mm (62,2 in)
42ZT	4.050 kg (8.929 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	32,3 kW - 43,9 HP	3.085 mm (121,5 in)	1.750 mm (68,9 in)

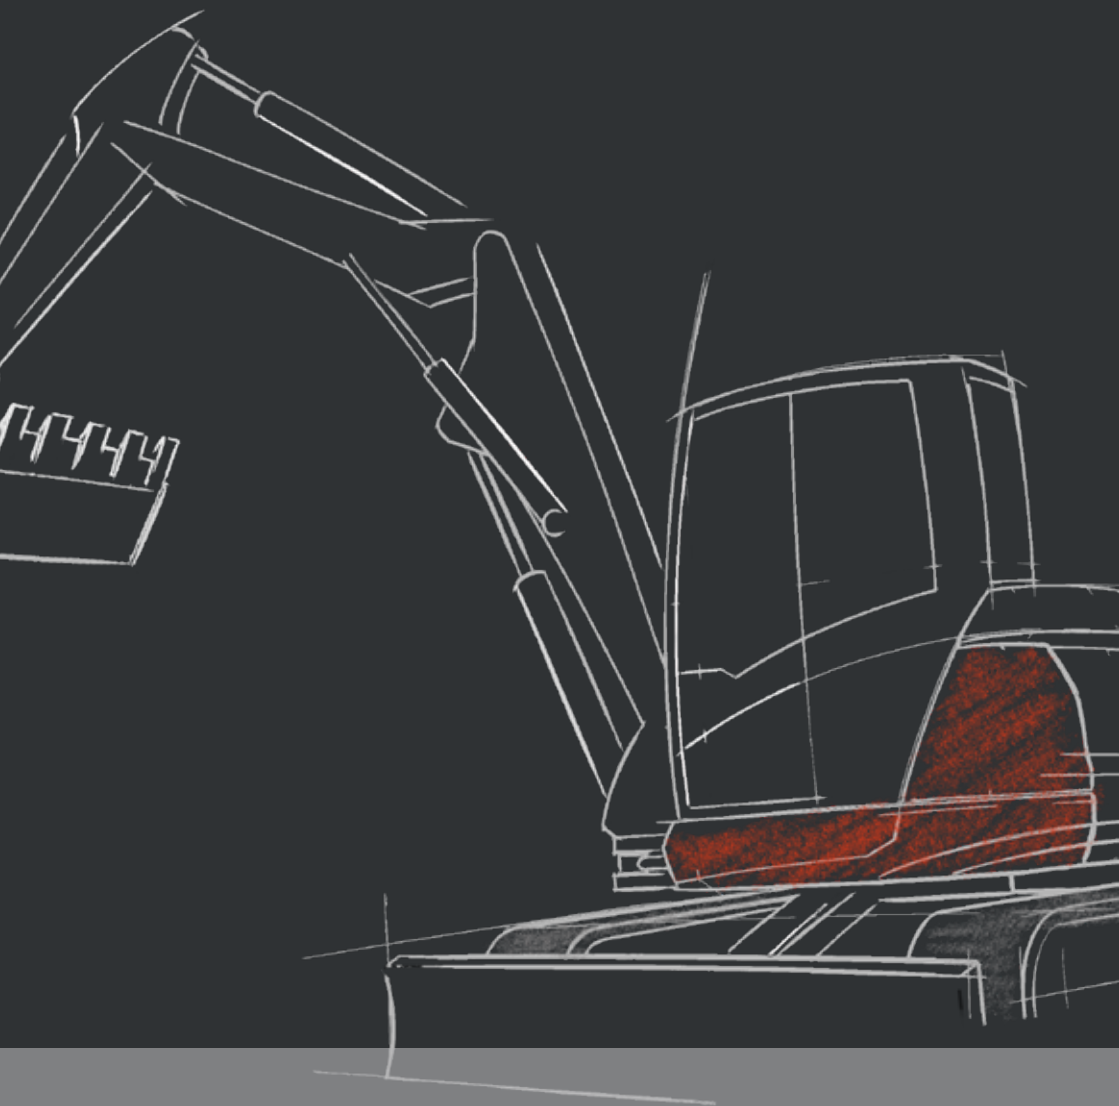

Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
45TR	4.450 kg (9.811 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	32,3 kW - 43,9 HP	3.190 mm (125,6 in)	1.750 mm (68,9 in)
50ZT	4.650 kg (10.251 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	42,6 kW - 57,9 HP	3.330 mm (131,1 in)	1.900 mm (74,8 in)
55TR	5.100 kg (11.244 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	42,6 kW - 57,9 HP	3.460 mm (136,2 in)	1.900 mm (74,8 in)
58ZT	5.400 kg (11.905 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	45,0 kW - 61,2 HP	3.400 mm (133,9 in)	1.980 mm (78,0 in)
60ZT	5.700 kg (12.566 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	45,0 kW - 61,2 HP	3.850 mm (151,6 in)	1.980 mm (78,0 in)
65TR	6.200 kg (13.669 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	45,0 kW - 61,2 HP	3.950 mm (155,5 in)	1.980 mm (78,0 in)



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
85SB	8.300 kg (18.298 lb)	YANMAR STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	3.800 mm (149,6 in)	2.320 mm (91,3 in)
90ZT	9.000 kg (19.842 lb)	YANMAR STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	4.270 mm (168,1 in)	2.320 mm (91,3 in)
95UR	9.100 kg (20.062 lb)	YANMAR STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	4.220 mm (166,1 in)	2.320 mm (91,3 in)
100TR	9.900 kg (21.825 lb)	YANMAR STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	4.570 mm (179,9 in)	2.320 mm (91,3 in)



PALE COMPATTE GOMMATE

COMPACT WHEELED LOADERS, CHARGEUSES SUR PNEUS,
REIFENKOMPAKTLADER, MINICARGADORAS COMPACTAS DE RUEDAS



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Carico operativo Operating load Charge opérationnel Betriebshublast Carga operativa	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
17SK	3.600 kg (6.834 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	50,0 kw - 67,1 HP	980 kg (2.161 lb)	1.715 mm (67,5 in)
19SK	4.350 kg (8.598 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	1.450 kg (3.638 lb)	1.840 mm (72,4 in)



PALE COMPATTE CINGOLATE

COMPACT TRACKED LOADERS, CHARGEUSES SUR CHENILLES,
RAUPENKOMPAKTLADER, MINICARGADORAS COMPACTAS DE CADENAS



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Carico operativo Operating load Charge opérationnel Betriebshublast Carga operativa	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
18TL	4.300 kg (9.039 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	50,0 kW - 67,1 HP	1.640 kg (3.616 lb)	1.790 mm (70,5 in)
20TL	5.470 kg (12.059 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	2.572 kg (5.670 lb)	2.090 mm (82,3 in)



MODELLI EXTRA UE

EXTRA EU MODELS, MODÈLES EXTRA EU,
EXTRA EU-MODELLE, MODELOS EXTRA UE



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
ES85SB	8.300 kg (18.298 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	3.800 mm (149,6 in)	2.320 mm (91,3 in)
ES85ZT	9.000 kg (18.298 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	4.270 mm (168,1 in)	2.320 mm (91,3 in)
ES90UR	9.100 kg (20.062 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	4.220 mm (166,1 in)	2.320 mm (91,3 in)
ES95TR	9.900 kg (21.825 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	4.570 mm (179,9 in)	2.320 mm (91,3 in)



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Carico operativo Operating load Charge opérationnel Betriebshublast Carga operativa	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
ESK190	4.350 kg (8.598 lb)	YANMAR STAGE 3A TURBO -TIER3	63,9 kW - 86,9 HP	1.450 kg (3.638 lb)	1.840 mm (72,4 in)
ETL200	5.470 kg (12.059 lb)	YANMAR STAGE 3A TURBO -TIER3	63,9 kW - 86,9 HP	2.572 kg (5.670 lb)	2.090 mm (82,3 in)



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
ESP22	1.910 kg (4.211 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	15,4 kW - 20,9 HP	min. 990 mm (39,0 in) max. 1.300 mm (51,2 in)
ESP25	2.400 kg (5.291 lb)	YANMAR STAGE 5 - TIER 4 FINAL	15,5 kW - 21,1 HP	1.500 mm (59,1 in)
ESP28	2.800 kg (6.173 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,2 kW - 24,7 HP	1.550 mm (61,0 in)
ESP35	3.050 kg (6.764 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,2 kW - 24,7 HP	1.580 mm (62,2 in)
ESP45	4.200 kg (9.259 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	32,3 kW - 43,3 HP	1.750 mm (68,9 in)
ESP55	4.800 kg (10.582 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	43,3 kW - 57,1 HP	1.900 mm (74,8 in)
ESP58	5.300 kg (11.685 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	45,0 kW - 61,2 HP	1.980 mm (78,0 in)
ESP65	5.400 kg (11.904 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	45,0 kW - 61,2 HP	1.980 mm (78,0 in)



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
ESP100ZT4	8.840 kg (19.489 lb) • 10.220 kg (22.531 lb)	YANMAR STAGE 5 TURBO - TIER 4 FINAL	53,7 kW - 73,0 HP	STD: 2.320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)

ESP100UR4	8.340 kg (18.387 lb) • 9.720 kg (21.429 lb)	YANMAR STAGE 5 TURBO - TIER 4 FINAL	53,7 kW - 73,0 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
------------------	--	--	-------------------	--

EXTRA-EU MODELS

(equipped with engine compliant with EPA TIER 3 or EU Stage IIIA emission standard)

ESP100ZT	8.840 kg (19.489 lb) • 10.220 kg (22.531 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	STD: 2.320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
-----------------	---	-------------------------------------	-------------------	---

ESP100UR	8.340 kg (18.387 lb) • 9.720 kg (21.429 lb)	YANMAR STAGE 3A - TIER 4 INTERIM	46,3 kW - 62,9 HP	STD: 2.320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
-----------------	--	-------------------------------------	-------------------	---

• carro variabile - variable undercarriage - chassis variable - verstellb. unterwagen - carro inferior variable



Attachments

*Increase **your** productivity*



For more information about the new line of customized Eurocomach equipment, contact your sales representative.

[illegible]



COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =

LAST UPDATE: 29/07/2021

Sampierana S.p.A. reserves the right to change technical data and product characteristics at any time without prior notice. The photos are for illustrative purposes only and do not necessarily refer to standard products.