



LA GAMMA | THE RANGE, LA GAMME
MODELL ÜBERSICHT, LA GAMA



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
12ZT	1.200 kg (2.646 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	8,8 kW - 11,8 HP	1.860 mm (73,2 in)	min. 790 mm (31,1 in) max. 1.050 mm (41,3 in)
14SR	1.255 kg (2.767 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	8,8 kW - 11,8 HP	2.045 mm (80,5 in)	min. 790 mm (31,1 in) max. 1.050 mm (41,3 in)
15ZT	1.580 kg (3.483 lb)	YANMAR STAGE 5 - TIER 4 FINAL	12,0 kW - 15,4 HP	2.020 mm (79,5 in)	min. 990 mm (39,0 in) max. 1.250 mm (49,2 in)
17SR	1.660kg (3.660 lb)	YANMAR STAGE 5 - TIER 4 FINAL	12,0 kW - 15,4 HP	2.220 mm (87,4 in)	min. 990 mm (39,0 in) max. 1.250 mm (49,2 in)
18ZT	1.720 kg (3.792 lb)	YANMAR STAGE 5 - TIER 4 FINAL	12,0 kW - 15,4 HP	2.280 mm (89,8 in)	min. 990 mm (39,0 in) max. 1.300 mm (51,2 in)
19ZT	1.770 kg (3.902 lb)	YANMAR STAGE 5 - TIER 4 FINAL	13,7 kW - 18,6 HP	2.280 mm (89,8 in)	min. 990 mm (39,0 in) max. 1.300 mm (51,2 in)
19TR	1.900 kg (4.189 lb)	YANMAR STAGE 5 - TIER 4 FINAL	13,7 kW - 18,6 HP	2.380 mm (93,7 in)	min. 990 mm (39,0 in) max. 1.300 mm (51,2 in)
22SR	2.090 kg (4.608 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	15,4 kW - 20,9 HP	2.560 mm (100,8 in)	min. 990 mm (39,0 in) max. 1.300 mm (51,2 in)
25ZT	2.450 kg (5.401 lb)	YANMAR STAGE 5 - TIER 4 FINAL	13,7 kW - 18,6 HP	2.700 mm (106,3 in)	1.500 mm (59,1 in)



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
28ZT	2.890 kg (6.371 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,2 kW - 24,7 HP	2.650 mm (104,3 in)	1.550 mm (61,0 in)
35ZT	3.120 kg (6.878 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,2 kW - 24,7 HP	2.870 mm (112,0 in)	1.580 mm (62,2 in)
42ZT	4.050 kg (8.929 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	32,3 kW - 43,9 HP	3.085 mm (121,5 in)	1.750 mm (68,9 in)
45TR	4.450 kg (9.811 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	32,3 kW - 43,9 HP	3.230 mm (127,2 in)	1.750 mm (68,9 in)
50ZT	4.800 kg (10.582 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	42,6 kW - 57,9 HP	3.330 mm (131,1 in)	1.900 mm (74,8 in)
55TR	5.250 kg (11.574 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	42,6 kW - 57,9 HP	3.490 mm (137,4 in)	1.900 mm (74,8 in)
58ZT	5.440 kg (11.993 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	44,3 kW - 60,2 HP	3.400 mm (133,9 in)	1.980 mm (78,0 in)
60ZT	5.740 kg (12.654 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	44,3 kW - 60,2 HP	3.700 mm (145,7 in)	1.980 mm (78,0 in)
65TR	6.290 kg (13.867 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	44,3 kW - 60,2 HP	3.850 mm (151,6 in)	1.980 mm (78,0 in)

MINI-ESCAVATORI ELETTRICI

ELECTRIC MINIEXCAVATOR, MINI-PELLE ÉLECTRIQUE
ELEKTRO-MINIBAGGER, MINIEXCAVADORA ELÉCTRICA



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
15X	1.315 kg (2.899 lb)	IPM (Internal Permanent Magnets)	11,0 kW	2.045 mm (80,5 in)	min. 790 mm (31,1 in) max. 1.050 mm (41,3 in)



ZERO
EMISSION



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Profondità di scavo Digging depth Prof. d'excavation Grabtiefe Prof. de excavación	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
75ZT	7.020 kg (15.476 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	44,3 kW - 60,2 HP	4.070 mm (160,2 in)	2.100 mm (82,7 in)
75TR	7.310 kg (16.116 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	44,3 kW - 60,2 HP	4.120 mm (162,2 in)	2.100 mm (82,7 in)
85SB	8.300 kg (18.298 lb)	YANMAR STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	3.800 mm (149,6 in)	2.320 mm (91,3 in)
90ZT	9.000 kg (18.298 lb)	YANMAR STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	4.270 mm (168,1 in)	2.320 mm (91,3 in)
95UR	9.100 kg (20.062 lb)	YANMAR STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	4.220 mm (166,1 in)	2.320 mm (91,3 in)
100TR	9.900 kg (21.825 lb)	YANMAR STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	4.570 mm (179,9 in)	2.320 mm (91,3 in)



PALE COMPATTE GOMMATE

COMPACT WHEELED LOADERS, CHARGEUSES SUR PNEUS,
REIFENKOMPAKTLADER, MINICARGADORAS COMPACTAS DE RUEDAS




Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Carico operativo Operating load Charge opérationnel Betriebshublast Carga operativa	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
17SK	3.600 kg (6.834 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	50,0 kw - 67,1 HP	980 kg (2.161 lb)	1.715 mm (67,5 in)
19SK	4.350 kg (8.598 lb)	YANMAR STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	1.450 kg (3.638 lb)	1.840 mm (72,4 in)

PALE COMPATTE CINGOLATE

COMPACT TRACKED LOADERS, CHARGEUSES SUR CHENILLES,
RAUPENKOMPAKTLADER, MINICARGADORAS COMPACTAS DE CADENAS



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Carico operativo Operating load Charge opérationnel Betriebshublast Carga operativa	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
18TL	4.300 kg (9.039 lb)	KUBOTA STAGE 5 TURBO -TIER 4 FINAL	50,0 kW - 67,1 HP	1.640 kg (3.616 lb)	1.790 mm (70,5 in)
20TL	5.470 kg (12.059 lb)	YANMAR STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	2.572 kg (5.670 lb)	2.090 mm (82,3 in)

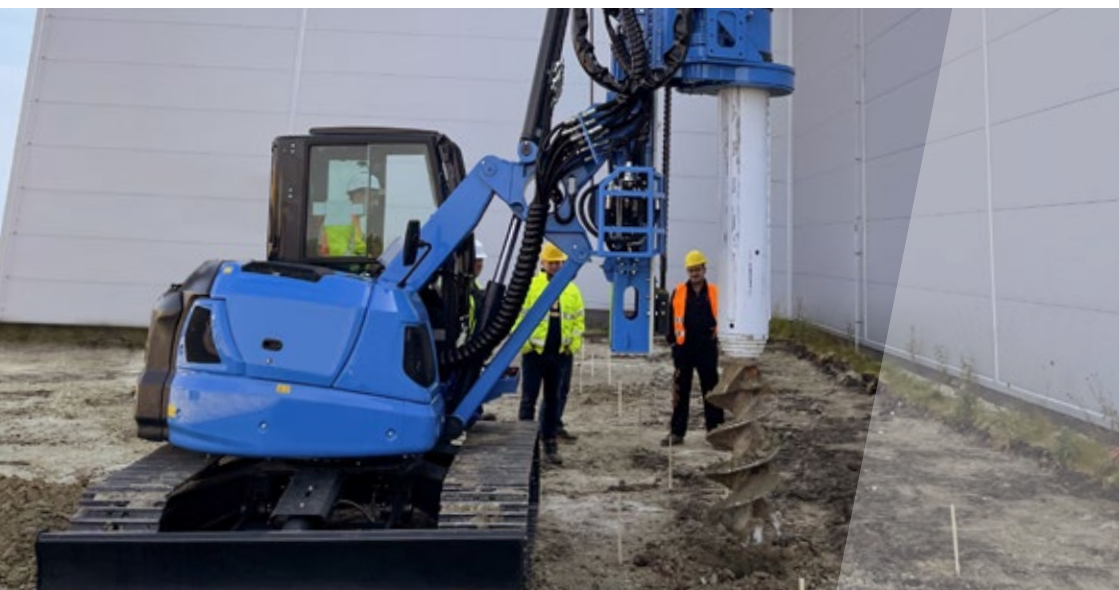

Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
ESP22	1.910 kg (4.211 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	15,4 kW - 20,9 HP	min. 990 mm (39,0 in) max. 1.300 mm (51,2 in)
ESP25	2.400 kg (5.291 lb)	YANMAR STAGE 5 - TIER 4 FINAL	15,5 kW - 21,1 HP	1.500 mm (59,1 in)
ESP28	2.800 kg (6.173 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,2 kW - 24,7 HP	1.550 mm (61,0 in)
ESP35	3.050 kg (6.764 lb)	KUBOTA STAGE 5 - TIER 4 FINAL	18,2 kW - 24,7 HP	1.580 mm (62,2 in)
ESP45	4.200 kg (9.259 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	32,3 kW - 43,3 HP	1.750 mm (68,9 in)
ESP55	4.800 kg (10.582 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	43,3 kW - 57,1 HP	1.900 mm (74,8 in)
ESP58	5.300 kg (11.685 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	45,0 kW - 61,2 HP	1.980 mm (78,0 in)
ESP65	5.400 kg (11.904 lb)	KUBOTA STAGE 5 TURBO - TIER 4 FINAL	45,0 kW - 61,2 HP	1.980 mm (78,0 in)



Modello Model Modèle Modell Modelo	Peso Weight Poids Betriebsgewicht Peso	Motore Engine Moteur Motor Motor	Potenza motore Engine power Type moteur Motorleistung Potencia motor	Larghezza max. Max. width Largeur max. Max. breite Anchura max.
ESP100ZT4	8.840 kg (19.489 lb) • 10.220 kg (22.531 lb)	YANMAR STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	STD: 2.320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)
ESP100UR4	8.340 kg (18.387 lb) • 9.720 kg (21.429 lb)	YANMAR STAGE 5 TURBO -TIER 4 FINAL	53,7 kW - 73,0 HP	STD: 2320 mm (91,3 in) OPT: min. 2.320 mm (91,3 in) max. 2.920 mm (115,0 in)

• carro variabile - variable undercarriage - chassis variable - verstellb. unterwagen - carro inferior variable

EUROCOMACH **GEOSERVICE**



MACHINE SETTINGS



DETAILED REPORTS



GEOFENCE CREATION





SMS/EMAIL NOTIFICATION



CURFEW SETTING



MOVEMENT ALARM (ENGINE OFF)



ANOMALIES ALARMS



MACHINE GEOLOCATION

Thanks to the GEO-SERVICE's intuitive interface, machines are always safe and under control.



Attachments

*Increase **your** productivity*



For more information about the new line of customized Eurocomach equipment, contact your sales representative.

This image shows a single sheet of white paper with horizontal blue or grey ruling lines. The lines are evenly spaced and run across the width of the page. There are approximately 20 lines visible. The paper has a slight shadow on the right side, suggesting it's resting on a surface.



**COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV GL
= ISO 9001 =**

LAST UPDATE: 15/10/2022

Sampierana S.p.A. reserves the right to change technical data and product characteristics at any time without prior notice. The photos are for illustrative purposes only and do not necessarily refer to standard products.