


AUGERS


Our auger for excavators is made of high quality steel and it incorporates many features that allow for more efficient and easy operations. Available in 5 models that can be attached to any mini-excavator and midi-excavator from 1.0 tonnes up to 15.0 tonnes, to achieve high drilling results. Cradle joint included. It supports the auger to enable horizontal drilling too. It also prevents auger oscillation during spoil discharge, enabling safe transportation and precise hole alignment.



Model	ATC150	ATC250	ATC350	ATC550	ATC1000
Excavator (tonne)	1.0-2.0	1.5-3.0	2.5-4.5	4.0-8.0	8.0-15.0
A (mm)	200	200	245	270	290
B (mm)	690	690	775	905	1025
Hex Ø mm	65	65	65	SQUARE 75	SQUARE 75
Weight without bit (kg)	65	66	98	140	230
Oil flow rate (l/min)	20-45	27-65	40-85	40-115	70-150
Pressure (bar)	205	240	240	260	260
Max. torque (n/m)	1500	2500	3600	5500	10600

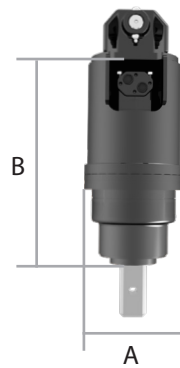

Mixer*

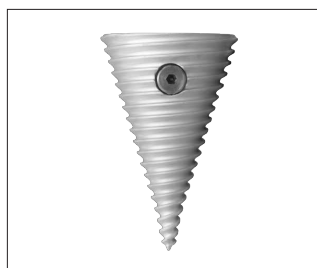

Log splitter moil point*



Milling machine*

* Available on request



ACCESSORIES:

Extension:

It allows for the drilling depth to be increased, the extensions are 1,000mm long

Model	ATC150-250-350	ATC550	ATC1000
-------	----------------	--------	---------

Bits:

Hex (mm)	Ø 65							
Length	1,200 mm							
Ø (mm)	150	200	250	300	350	400	500	600

Standard bit: suitable for drilling soils of medium consistency

Rock bit: suitable for drilling very hard soils with the presence of rocks or crushed stones

Bits:

Hex (mm)	SQUARE 75mm							
Length	1,500 mm (for ATC 550)							
Ø (mm)	150	200	250	300	350	400	500	600

Standard bit: suitable for drilling soils of medium consistency

Rock bit: suitable for drilling very hard soils with the presence of rocks or crushed stones

Bits:

Hex (mm)	SQUARE 75mm							
Length	1,800 mm (for ATC 1000)							
Ø (mm)	150	200	250	300	350	400	500	600

Standard bit: suitable for drilling soils of medium consistency

Rock bit: suitable for drilling very hard soils with the presence of rocks or crushed stones

Pin coupler:

Model	ATC150	ATC250	ATC350	ATC550	ATC1000
-------	--------	--------	--------	--------	---------

Quick-coupling attachment coupler:

Quick-coupling attachment	Excavator (tonne)							
	0.6-2.1	2.2-2.5	2.6-3.5	3.6-4.1	4.2-5.5	5.6-6.0	6.1-7.5	7.6-10.0
AR	AR 15	AR 30		AR 40		AR 50		AR 70
CR	CR 15	CR 30		CR 40		CR 50		CR 70
CS JANUS	CS 10 JANUS PRO	CS 30 JANUS PRO					CS 80 JANUS PRO	
KLAC	KLAC C	KLAC D			KLAC E			KLAC F
S NORDIC	S30/150 - S30/180		S40-200			S 45	S 50	
CM	CM 20	CM 30			CM 100			
KLAC Alternatik	0	1		2		3		

Connection kit:

Excavator (tonne)							
0.6-2.1	2.2-2.5	2.6-3.5	3.6-4.1	4.2-5.5	5.6-6.0	6.1-7.5	7.6-10.0

